

# Sw electronics Presentation



Head office (in korea)

Address : 742-15, otea dong, gumi city, gyeong buk, korea

T E L : 82 54-463-5517

F A X : 82 54-463-5527

YANTAI FACTORY OFFICE ( in china)

Address : 89 huanhai road, yantai, china

T E L : 82 535-682-5767

F A X : 82 535-682-5797

Homepage : <http://www.swxt.co.kr>

E-mail : [swxt@swxt.co.kr](mailto:swxt@swxt.co.kr)

# 企业概况

- 公司名称: SW ELECTRONICS(烟台大运电子有限公司)
- 主营业务: 晶体滤波器 谐振器、振荡器等系列频率控制产品的制造和销售
- 成立日期: 1988年10月8号
- 董事长: 黄智焯
- 公司地址: 中国山东省烟台市芝罘区环海路89号
- 注册资金: \$320万
- 年销售额
  - 2009年: \$2,532,253
  - 2008年: \$1,725,433
- 职员: 67名
- 公司占地面积: 1800平方米
- Tel: 86-535-682-5767 (0535-6825767)
- FAX: 86-535-682-5797 (0535-6825797)
- 公司主页: [www.swxt.co.kr](http://www.swxt.co.kr)


# 发展大事记

- 1988年10月8日 首尔电子有限公司成立
- 1988年10月8日起 生产晶体谐振器, 振荡器。
- 1991年3月起 开始晶体滤波器的生产。
- 2004年4月1日 公司更换名称。
- 首尔电子 → SW 电子.
- 2006年 01月09日 中国烟台大运电子有限公司成立
- 2010年 06月 07日 SW电子 韩国忠州办事处成立



**创立期**  
晶体谐振器, 晶体振荡器  
滤波器的生产



**成长期**  
OSC生产  
7by5, 5by32 等  
Ceramic type 生产

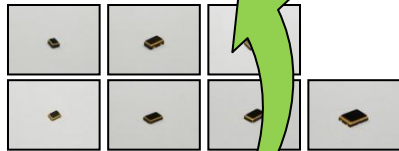

**发展期**  
3.2by2.5  
2.5by2.0 转换为微型滤波器生产  
ISO9001/14001 认证  
韩国忠州市成立办事处

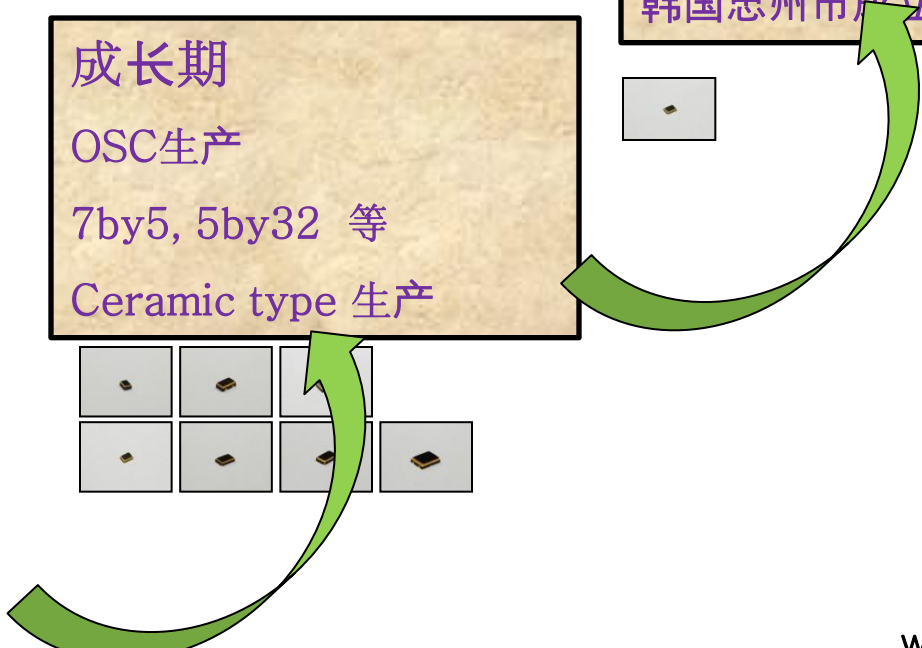

# Production Factories Office (china& Korea)

KOREA

SW ELECTRONICS



CHINA

SW ELECTRONICS


(Metal Type)




CHINA



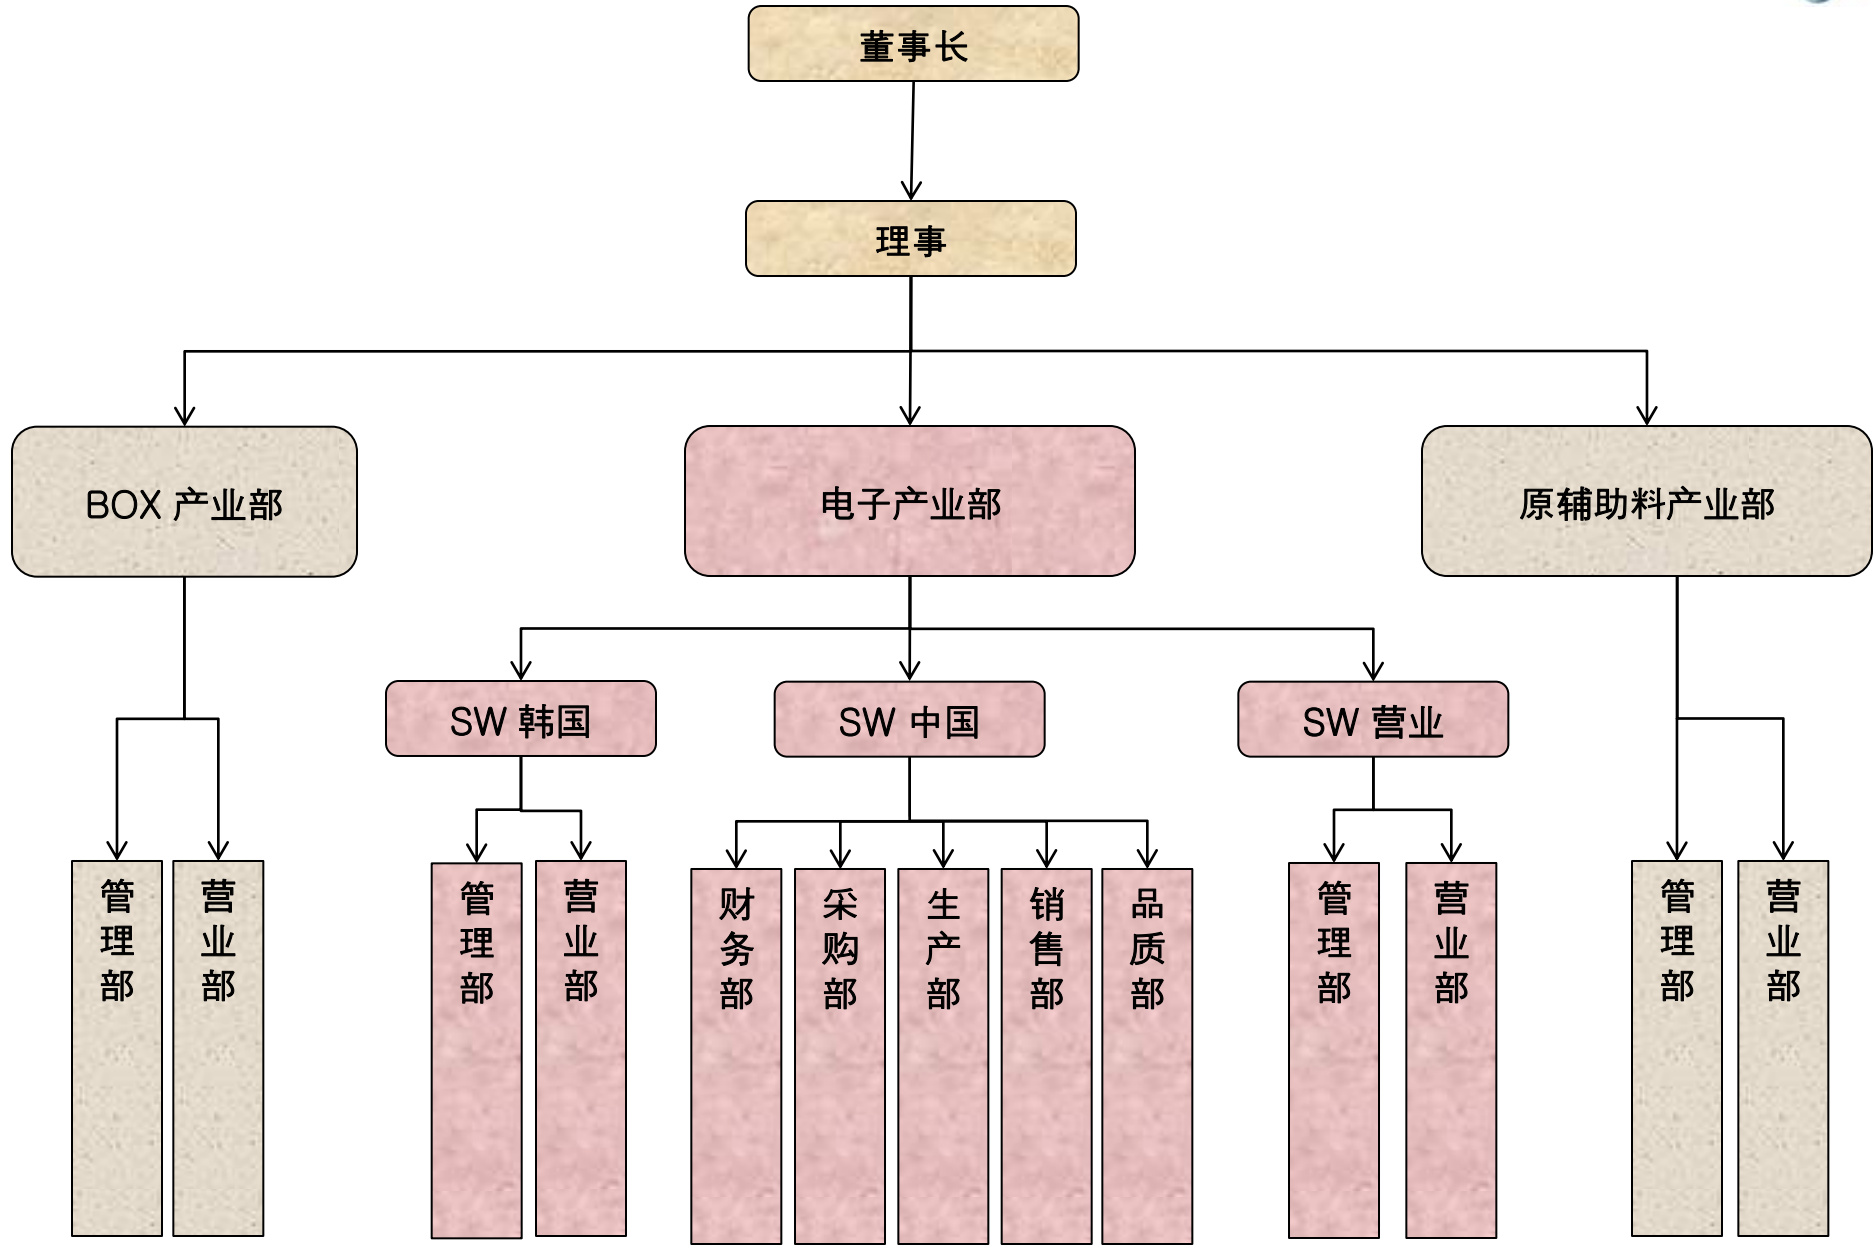





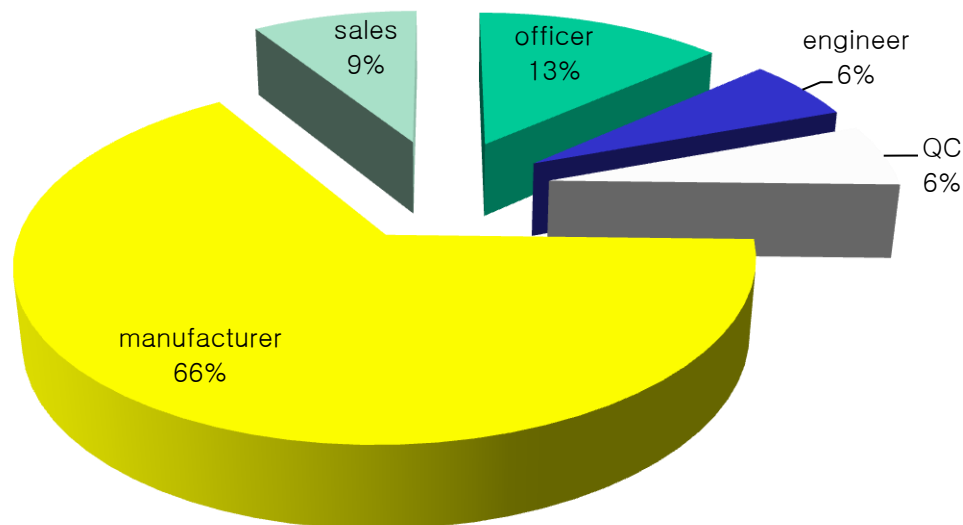

























Yufeng INDUSTRIAL

(Ceramic Type)






Division	officer	engineer	QC	manufacturer	sales	Total
In Korea	2	2	2		5	11
In China	7	2	2	44	1	56
<b>Total</b>	<b>9</b>	<b>4</b>	<b>4</b>	<b>44</b>	<b>6</b>	<b>67</b>

 Crystal unit						
 Metal OSC						
 Ceramic OSC.						
 Ceramic X-TAL						
 M.C.F.						
 Cylinder X-TAL						
 TCXO. VCXO						

# Product Capacity per Month ( In CHINA)

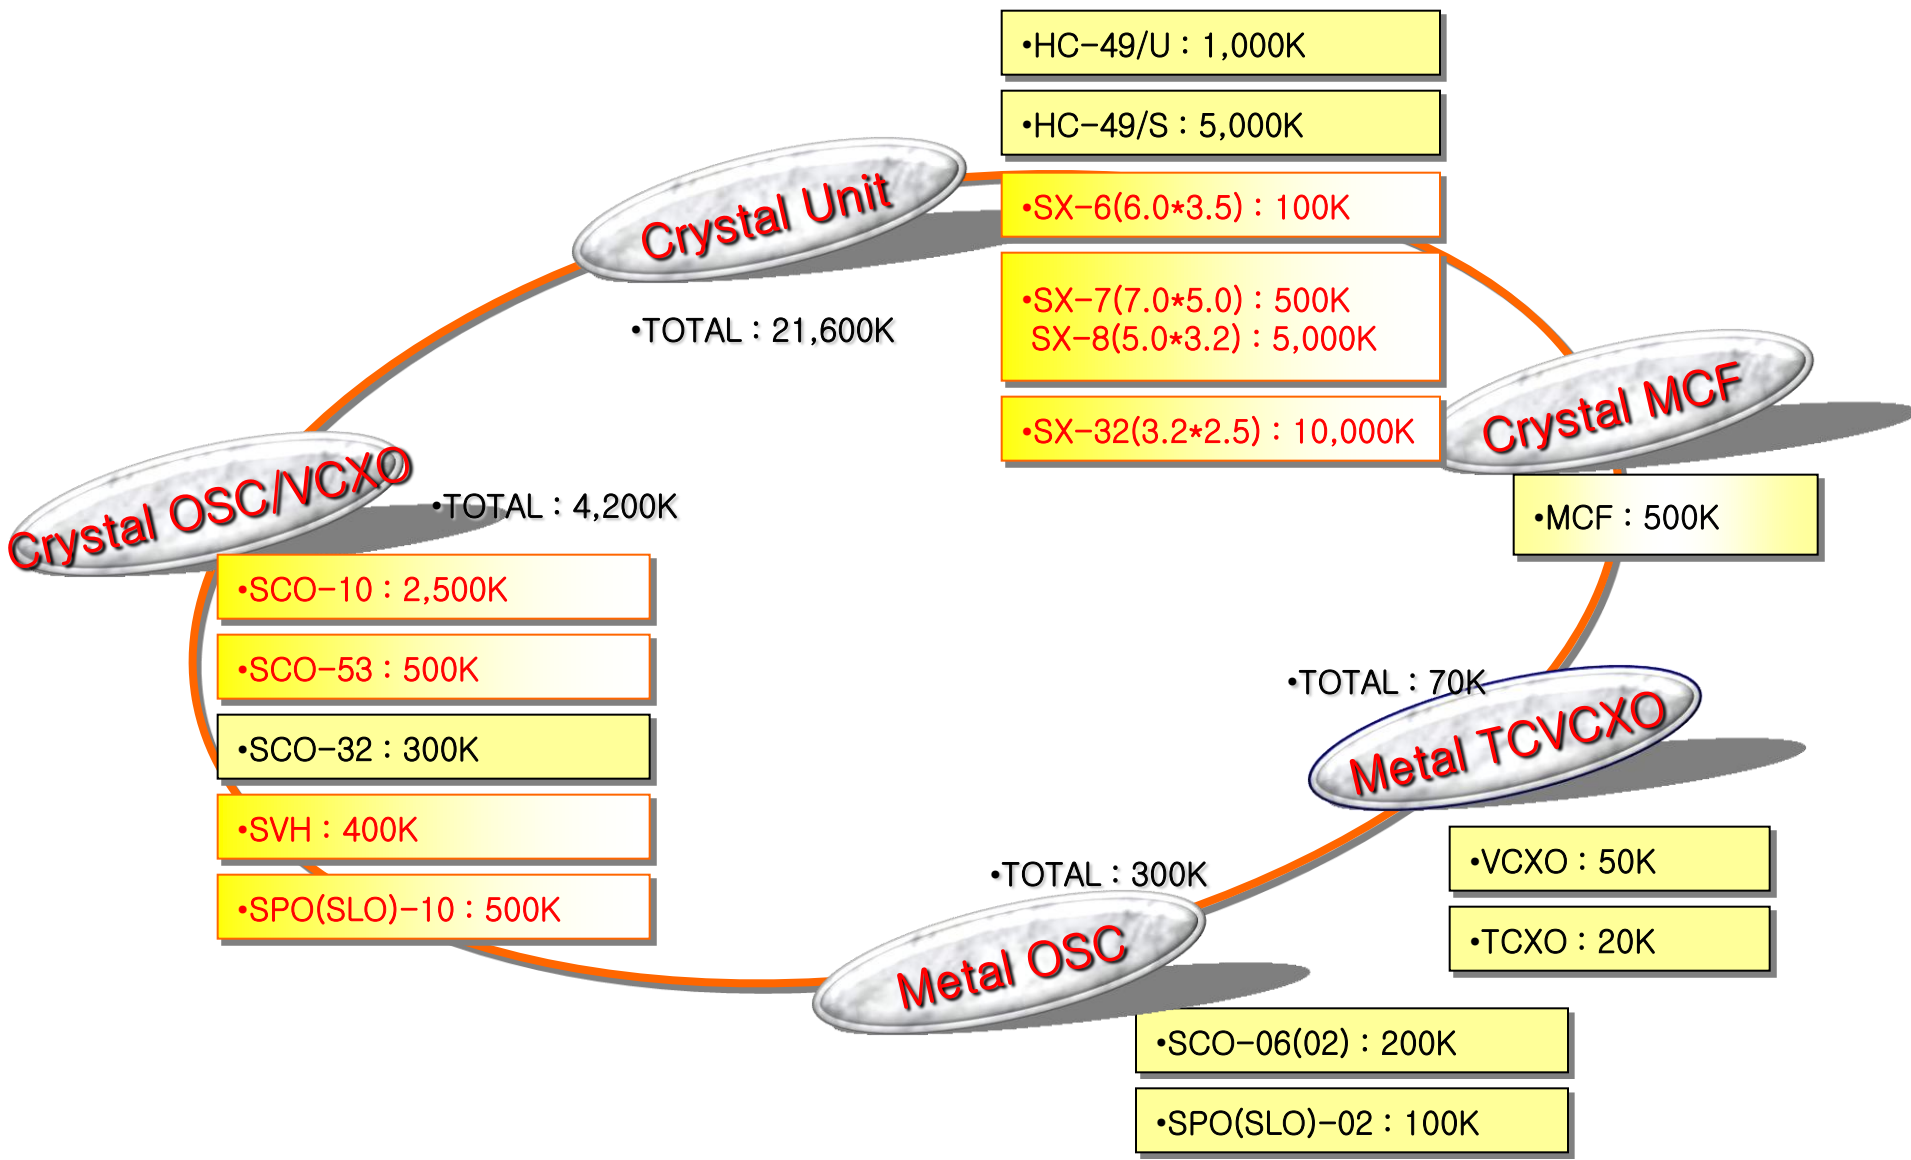



# Production Process (BLANK PRODUCT)




<水晶原矿石入仓>



<水晶原矿石粘着>



<水晶原矿石切割>

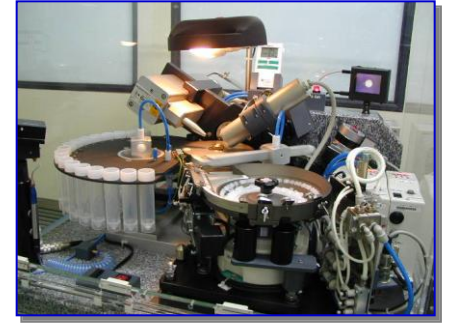

<水晶片 测角度>



<Wafer 粘着后 研磨>




<研磨 #1000>



<研磨 #2500>




<研磨 #4000>

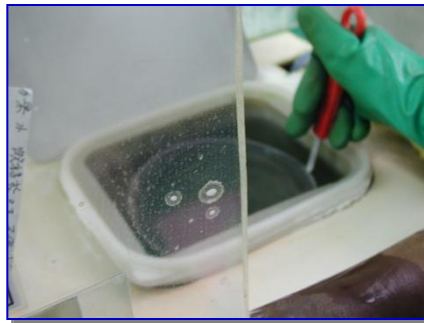


<琢刻>



<频率分类>

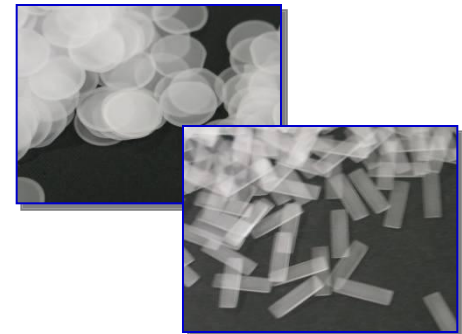

<BLANK 加工完成>

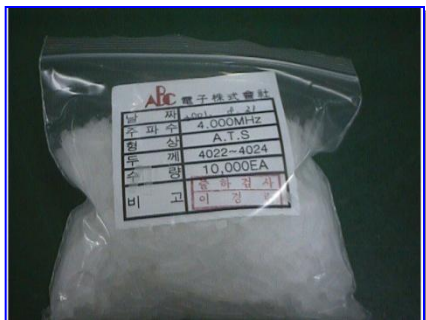

<BLANK 收集>



<洗净>



<下部黏貼>



<組合黏貼>



<黏貼净化>



<铸造黏貼>



<内部检测>



<外部检测>



<熔接>



<机密检测>



<REFLOW>



<实效处理>

# Production Process (Metal PRODUCT)



<温度检测>



<最终检测>



<印编号>




<Lead切割>



<外观检测>





<绝缘体插入>

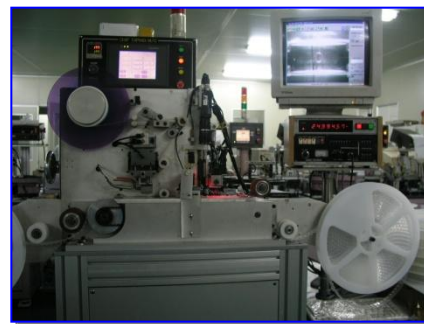

<Tapping>



<包装>



# Reliability Test Process (Metal PRODUCT)




NO	Test Name	Test Procedure & Condition	Recommended Test Method
1	High Temperature Storage (HTS)	Temperature = +85°C, Duration = 168 hrs	
2	Low Temperature Storage (LTS)	Temperature = -40°C Duration = 168 hrs	
3	Humidity Test (HT)	Precondition = Reflow Sock Ta=+260±5°C 10sec 2Times(only SMD) Relative Humidity = +85°C/90~95% Duration = 168 hrs	MIL-STD-883 Method 1004
4	Thermal Shock (TS)	Temperature = -40°C to +85°C Duration = 1Hours N=15 cycles, Temp' shift shall be done within 30sec	MIL-STD-883 Method 1010
5	Aging (A)	Temperature = +85°C, Duration: 1,000 hour	MIL-O-55310
6	Terminal Strength (TS-PT) / Pull Test (Only Through-Hole)	Weight = 2 pounds (lb), Duration = 5 ~ 10 sec	MIL-STD-202 Method 211 Condition A
	Terminal Strength (TS-BT) / Bend Test (Only Through-Hole)	Weight = 1 pounds (lb) Bending Angle = 90 degree Bending Count = 3 times * The rate of bending shall be approximately 3 seconds per bend in each direction.	MIL-STD-202 Method 211 Condition C
7	Solder ability (SLD)	Precondition = 16 hours at 150°C Dry Bake is recommended but 8 hours of Steam Aging Soldering Temperature = +245 °C ± 5 °C Solder Immersion Time = 5 ± 0.5 s	MIL-STD-883 Method 2003, The test method from J-STD-002
8	Resistance to Soldering Heat (RSH)	Solder Iron = +350°C±10°C (solder iron temp) / 4~5s Dip = +260°C±5°C(solder temp) / 10 ±1s IR/convection reflow = +250°C ± 5 °C / 30±5s	MIL-STD-202 Method 210
9	Drop Test (DT)	High = 750mm onto hard wooden board Drop Time = 3 times (Only 49/S TYPE : 500mm)	
10	Vibration (V)	Vibration Frequency = 10 to 55 Hz, 1.5mm, Full wave Cycle = 2 min Direction = X.Y.Z, Time = 2 hours in each direction	MIL-STD-883 Method 2007 Condition A
11	Seal / Gross Leak (GL)	Fluorocarbon liquid at 125°C ±5°C Immersion Time = 30 sec.	MIL-STD-202 Method 112 Test Condition D
	Seal / Fine Leak (FL)	Leak rate shall be measured by using = Mass-spectrometer-type helium leak detector	MIL-STD-202 Method 112 Test Condition D

## 제품 내 환경 유해 물질 (ROHS, WEEE) 분석 결과

\* 당사는 삼성전자 납입기준 ICP DATA 유효기간 2년을 적용 함.  
 \* 특별 요청이 있을 경우, ICP DATA 유효기간 1년의 성적서를 제출토록 함.



완제품	SX-1 CRYSTAL						TOTAL
품명	1) CAN	2) BASE	3) ELECTRODE	4) QUARTZ	5) SILVER EPOXY	6) INSULATOR	
재질	C7521	SPCC	SILVER	SILICONE DIOXIE	SILVER	PPS	*
중량 (g/ea)	0.155	0.362	0.005	0.015	0.002	0.055	0.594
%	26.09427609	60.94276094	0.841750842	2.525252525	0.336700337	9.259259259	100.000
제조업체명	선명테크	jewon	유창금속	가람전자	3본드	태승화학	*
표면처리	Ni	Ni	*	*	*	*	Ni
사용의도	변색방지	변색방지	*	*	*	*	*
수량	1	1	1	1	2	1	7
유해 물질 함유량 (ppm)							TOTAL (ppm)
Pb	50.4	N.D	N.D	N.D	N.D	N.D	50.4
Cd	N.D	N.D	N.D	N.D	N.D	N.D	0
Hg	N.D	N.D	N.D	N.D	N.D	N.D	0
Cr6+	N.D	N.D	N.D	N.D	N.D	N.D	0
PBB	N.D	N.D	N.D	*	N.D	N.D	0
PBDE	N.D	N.D	N.D	*	N.D	N.D	0
PFOs(B,C)	N/A	N/A	N/A	N/A	N/A	N.D	N/A
SVHC	N/A	N/A	N/A	N/A	N/A	N/A	N/A
예외조항	N/A	N/A	N/A	N/A	N/A	N/A	N/A
CASNO	7440-50-8	7439-89-6	7440-22-4	14808-60-7	7440-22-4	9016-75-5	*
성적서NO	CTSAYAA09-23960	CANEC1000991302	CTSAYAA10-06086	SH9115818	CTSAYAA09-34323	RT09R-U1659-002-E	*
DATE	2009-08-26	2010-03-18	2010-03-03	2009-06-23	2009-12-08	2009-08-20	*
분석기관	SGS	SGS	SGS	SGS	SGS	INTERTEK	*
ICP DATA							
MSDS DATA							

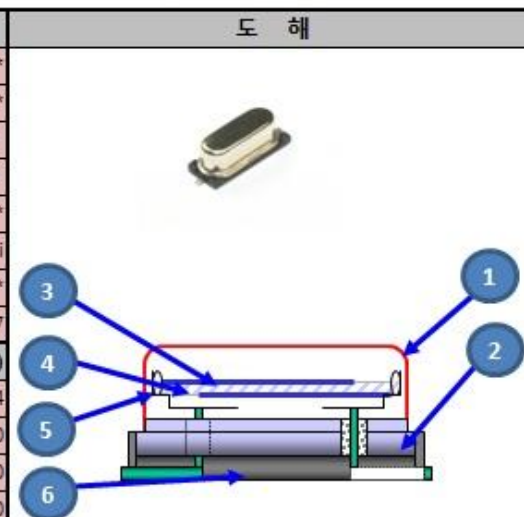

작성	검토	승인
9/28	9/28	9/28



<BLANK 收集>



<洗净>



<下部黏贴>



<组合黏贴>



<黏贴净化>



<铸造黏贴>



<内部检测>



<外观检测>



<ceiling >



<机密检测>



<REFLOW>



<实效处理>

# Production Process (Ceramic PRODUCT)



<温度检测>




<最终检测>



<印编号>





<出荷检测>

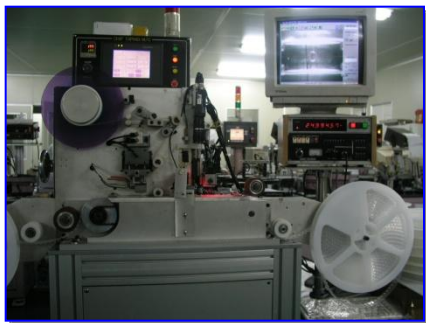

<Tapping>



<包装>



# Reliability Test Process (Ceramic PRODUCT)



NO	Test Name	Test Procedure & Condition	Recommended Test Method
1	High Temperature Storage (HTS)	Temperature = +85°C Duration = 168 hrs	
2	Low Temperature Storage (LTS)	Temperature = -40°C Duration = 168 hrs	
3	Humidity Test (HT)	Precondition = Reflow Sock Ta=+260±5°C 10sec 2Times(only SMD) Relative Humidity = +85°C/90~95% Duration = 168 hrs	MIL-STD-883 Method 1004
4	Thermal Shock (TS)	Temperature = -55°C to +125°C Duration = 30 min N=15 cycles Temp' shift shall be done within 30sec	MIL-STD-883 Method 1010
5	Aging (A)	Temperature = +85°C Duration: 1,000 hours	MIL-O-55310
6	Solder ability (SLD)	Precondition = 16 hours at 150°C Dry Bake is recommended but 8 hours of Steam Aging Soldering Temperature = +245 °C ± 5 °C Solder Immersion Time = 5 ± 0.5 s	MIL-STD-883 Method 2003, The test method from J-STD-002
7	Resistance to Soldering Heat (RSH)	Solder Iron = +350°C±10°C(solder iron temp) / 4~5s Dip = +260°C±5°C(solder temp) / 10 ± 1s IR/convection reflow = +250°C ± 5 °C / 30±5s	MIL-STD-202 Method 210
8	Drop Test (DT)	Hight = 1200mm onto hard wooden board Drop Time = 3 times	
9	Vibration (V)	Vibration Frequency = 10 to 55 Hz, 1.5mm, Full wave Cycle = 2 min Direction = X.Y.Z Time = 2 hours in each direction	MIL-STD-883 Method 2007 Condition A
10	Seal / Gross Leak (GL)	Fluorocarbon liquid at 125°C ±5°C Immersion Time = 30 sec.	MIL-STD-202 Method 112 Test Condition D
	Seal / Fine Leak (FL)	Leak rate shall be measured by using = Mass-spectrometer-type helium leak detector	MIL-STD-202 Method 112 Test Condition D




## 제품 내 환경 유해 물질 (ROHS, WEEE) 분석 결과

\* 당사는 삼성전자 납입기준 ICP DATA 유효기간 2년을 적용 함.  
 \* 특별 요청이 있을 경우, ICP DATA 유효기간 1년의 성적서를 제출토록 함.



완제품	SX-32 CRYSTAL (3.2 by 2.5mm)					TOTAL
품명	1) PACKAGE	4) BLANK	3) SILVER	5) ADHESION	2) LID	*
재질	Al2O3	SiO2	Ag	Ag	Ni	*
중량 (g/ea)	0.02023	0.00034	0.00001	0.00003	0.00482	0.0254
%	79.55171058	1.337003539	0.000323634	0.117970901	18.95399135	100.000
제조업체명	KYOCERA	가람전자	유창금속	3본드	한국포토엡칭	*
표면처리	*		*	*	Ni	Ni
사용의도	*	*	*	*	납땜성강화	*
수량	1	1	1	2	1	6
유해 물질 함유량 (ppm)						TOTAL (ppm)
Pb	N.D	N.D	N.D	N.D	N.D	0
Cd	N.D	N.D	N.D	N.D	N.D	0
Hg	N.D	N.D	N.D	N.D	N.D	0
Cr6+	N.D	N.D	N.D	N.D	N.D	0
PBB	N.A	*	N.D	N.D	N.D	0
PBDE	N.A	*	N.D	N.D	N.D	0
PFOS(B,Cl)	N/A	N/A	N/A	N/A	N/A	N/A
SVHC	N/A	N/A	N/A	N/A	N/A	N/A
예외조항	N/A	N/A	N/A	N/A	N/A	N/A
CASNO	1344-28-1	14808-60-7	7440-22-4	7440-22-4	1309-37-1	*
성적서NO	SDEKG-09-420	SH9115818	CTSAYAA10-06086	CTSAYAA09-34323	CTSAYAU10-01564	*
DATE	2009-06-02	2009-06-23	2010-03-03	2009-12-08	2010-04-05	*
분석기관	SGS	SGS	SGS	SGS	SGS	*
ICP DATA						
MSDS DATA						

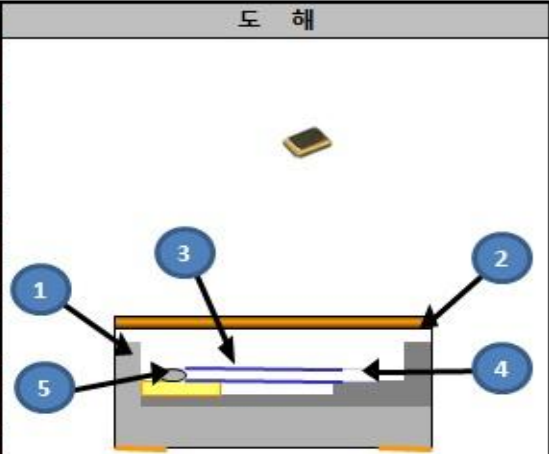

작성	검토	승인
9/28	9/28	9/28

# Application

